

# myWall®

## INSTALLATION GUIDE (STANDARD INTERIOR WALL)

### **Recommended Additional Items:**

Level

Tape measure

Stud finder

Drill

Pencil

Ladder

French cleat mounting hardware

myWall.

## INSTALLING MYWALL ONTO STANDARD WALL

### WARNING:

Prior to mounting french cleat onto wall, check for proper mounting anchors to use. (drywall, metal studs, wood studs, or concrete block will all need different hardware)

### WARNING:

Recommended use of side locking plate on walls after installation of each individual panel (this ensures the safety of panel attaching securely to french cleat)

## STEPS



1

### Unpack boxes

(Ensure all parts are included for your wall installation)



2

Locate metal or wood stud locations on wall for mounting.

(Recommended use of a stud finder)

WARNING: Check for plumbing or electrical locations within wall.



3

Mark location for French Cleat.

French cleat height from floor to base of cleat can depend on use of panels.

Recommended height is **83.5 inches** from floor to **bottom** of french cleat.

(This will allow for wall plugs to be left exposed behind the lower panel for use)

(Ensure that French Cleat mounts level)


(Ensure to shim if needed for cleat to be perfectly flat on wall)



Secure French Cleat to desired location with correct mounting hardware.


Ensure that your cleat mounts level

(Correct mounting hardware will depend on overall wall structure used for mounting. Mount directly into wood studs, metal studs, concrete block etc.) (Do not mount into drywall only)

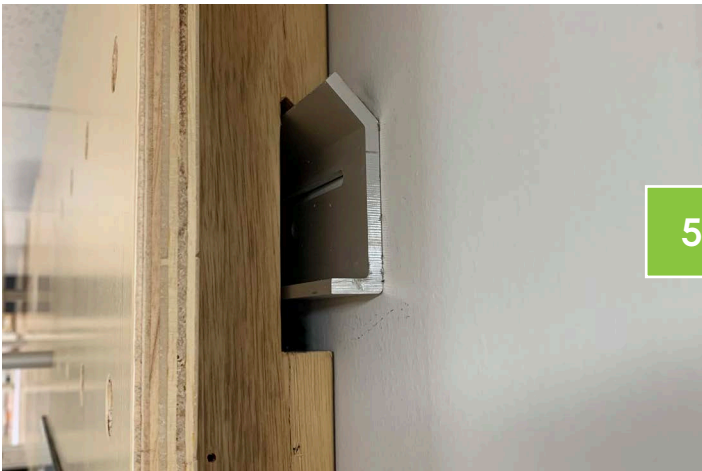


Hang panels on cleat

(mount locking panels as you go)  
(if panels are not hanging flush at bottom, see step 9 for mounting plates on back as needed)

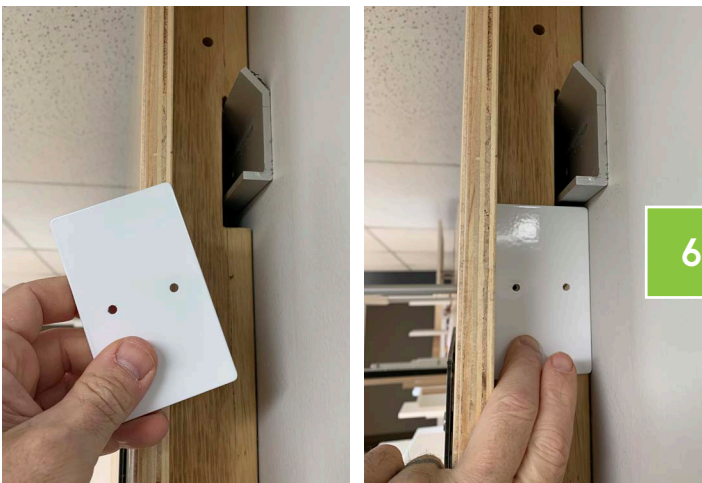


Attach safety locking plate to left or right side of mywall panels. This can be done as each panel is attached onto the wall.

(Recommended within overall installation)

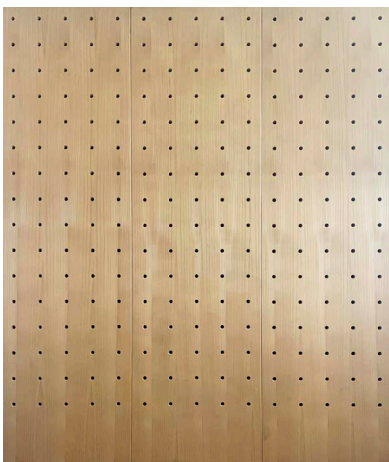

7

Ensure all panels are pushed together for a uniform fit.

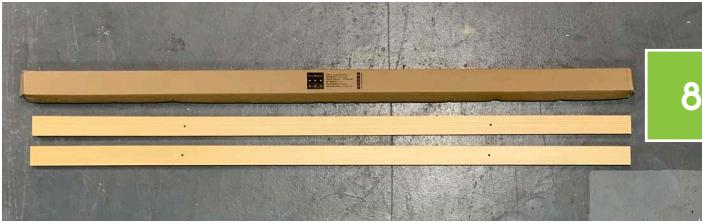

8

If end-caps came with your system, attach to outside edges with provided screws.



9

If panels are not hanging flush at bottom, take off and attach plates to back bottom of panels on sides and then slide back together.

(This may be due to the wall not being flat)



# RENEWABLE RESOURCES

The myWall system uses Falkata and Rubber wood, a renewable resources.

**Reduce:** We work with our manufacturing partners to ensure we are leaving as small a carbon footprint as possible.


**Re-use:** Our products are durable and designed to last, cutting down the need to discard our products and purchase new ones.

**Recycle:** Our products and components use recyclable materials.



myWall is a registered trademark and patented product of AdaptivDC

All Rights Reserved.  
©2023

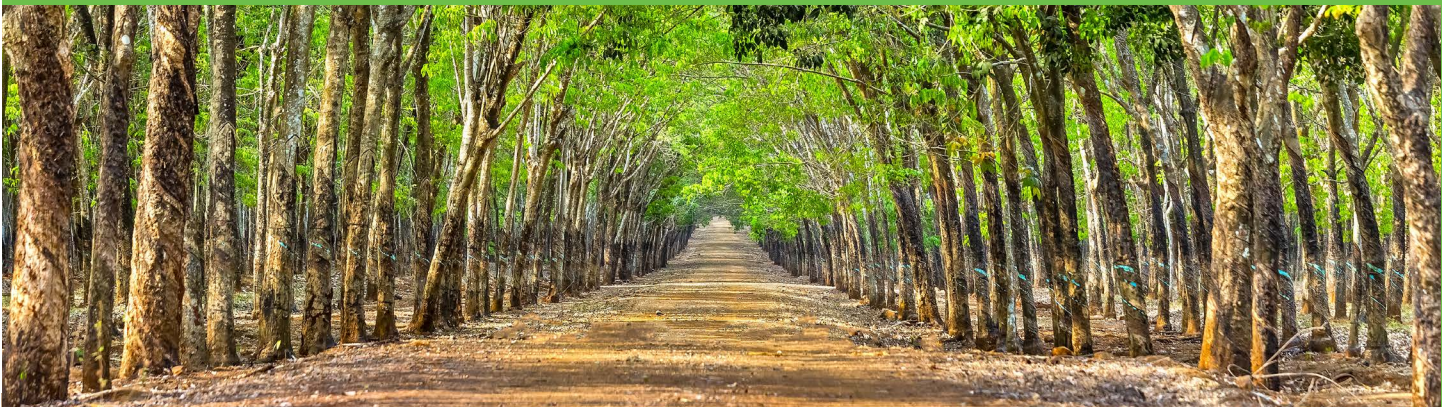

adaptiv  
DC

AdaptivDC  
42395 Ryan Road  
Suite 112 / PMB 212  
Ashburn, VA 20148

800. 693. 0068  
hello@adaptivdc.com  
adaptivdc.com